

Huizhou Hi-Zealed Electronic Co., Ltd.



Add: No.12, Jinling Road, Zhongkai Hi-tech Development Zone,
Huizhou City, Guangdong, China 516006
Tel: 86-752-2771789 Fax: 86-752-2771684
Email: hizealed@hi-zealed.cn
Web: www.hzleddriver.com

HZD060CVI

60W Dimmable 0/1-10V LED DRIVER

Product Features

- Constant current output. , parameters can be customized from 24W to 60W. Output voltage > 20V .
- Class 2 LED power supply, Double-isolated
- Short circuit, over current and over voltage protection. Efficiency more than 84% .
- Compatible with all 0/1-10V dimming system.
- Light will be off when dim to 0V. Dimming range: 5-100%
- 3 years quality warranty

Technical Specifications

Model No.	Output Power	Input Voltage Range	AC-Frequency	Standby Power	Output Current	On Load Voltage	Power Factor	Efficiency	Dimensions	Weight
HZD060 CVI	60 W	85-265V AC	50-60Hz	0.74A Max	900 mA	34-68V	0.95	88%	140*45*28 mm	138g
					1200 mA	24-50V		86%		
					1400 mA	20-40V		84%		
					1500mA	20-40V		84%		


Environmental Specifications

Operating Temperature	-30~45°C
Storage Temperature	-40~+70°C
Thermal Dissipation	Nature
Relative Humidity	5~95%
Isolation Voltage	---
Vibration	5-55Hz/2g, 30 Minutes
Life Time	18000Hours, at TC max


Conformity & Standards

EMI	EN55022 EN55015 Class B
Safety	EN60598
Electromagnetic Immunity	EN61547, ENV5024 EN61000-4-2/3/4/6/8/11
Harmonic Current Emissions	EN61000-3-2 EN61000-3-3


Power Factor Characteristic

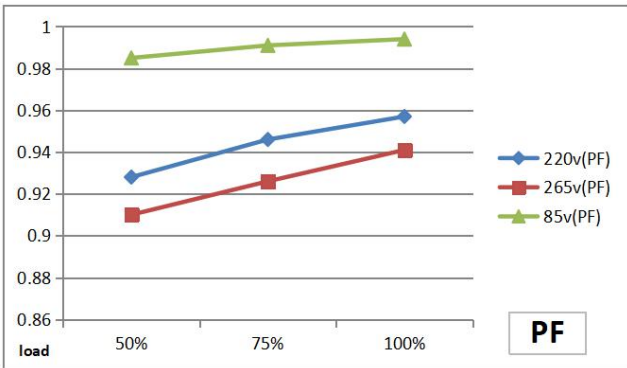



Efficiency vs Load

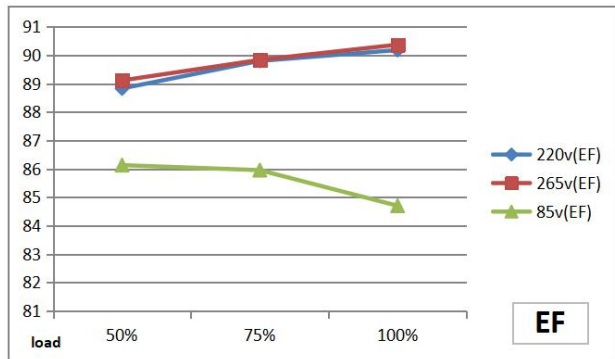

Installation Introduction

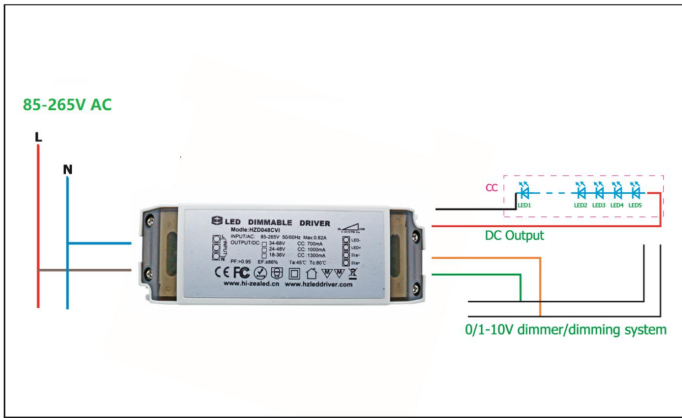

Dimensions Parameter

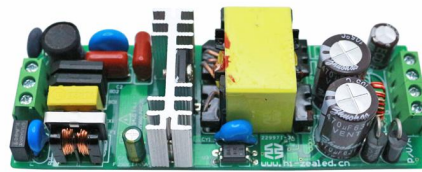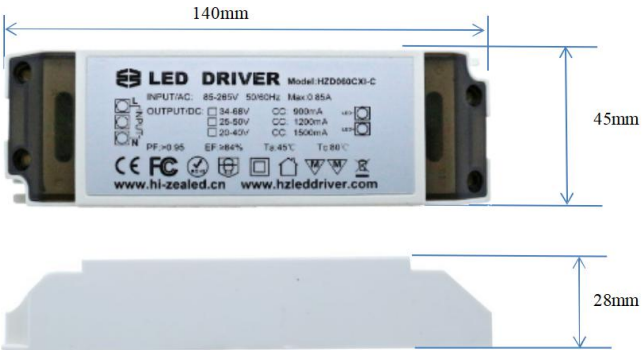

Size: 110.5*39.5*24 mm(L*W*H)
Weight: 98g